

# IKARUS


543 546 405 405Exp E-13 E-91



## Midi Line

# IKARUS

# Midi

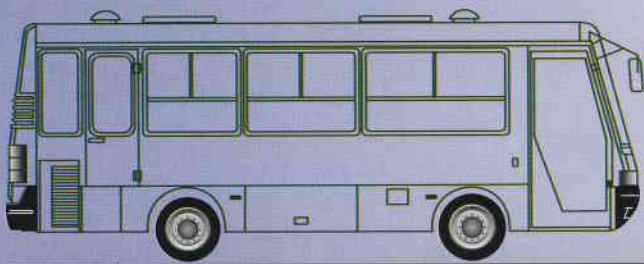


Doors 1-0-0 / 1-1-0 / 1-2-0

## 543




Doors 0-1-0 / 0-2-0 / 0-2-2

## 546

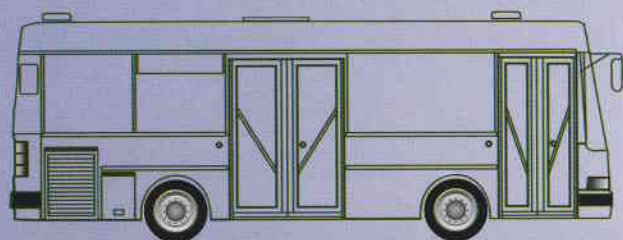


Doors 1-2-0 / 1-1-0

## 405

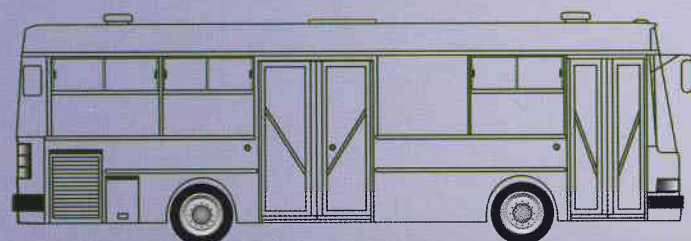


Doors 1-0-0 / 1-2-0

## 405 Exp

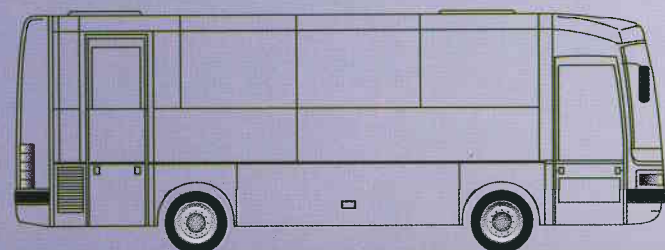

Doors 1-0-1

## E-13

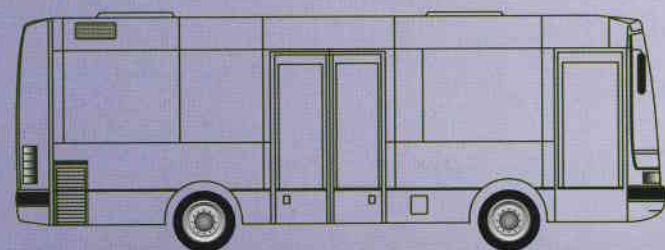

Doors 1-1-0 / 1-2-0

## E-91

Length,mm	7575	Front approach(°)	11.0	Gross veh. weight (kg)*	9000
Width,mm	2300	Rear approach(°)	9.0	Axle load max.A (kg)*	3200
Height,mm	2920	Clear height,mm	300	Axle load max.B (kg)*	5800
Wheel base,mm	3420	Step height,mm	350	Axle load max.C (kg)*	
Front overhang,mm	2000	Floor height,mm	780	Tyre size	215/75 R 17.5
Back overhang,mm	2155	Indoor height,mm	1928	Outer diam.of turning circle,mm	17000
Seat capacity*	32	Standing places*	10		

Length,mm	7620	Front approach(°)	33.0	Gross veh. weight (kg)*	6000
Width,mm	2090	Rear approach(°)	10.0	Axle load max.A (kg)*	2200
Height,mm	2965	Clear height,mm	250	Axle load max.B (kg)*	4360
Wheel base,mm	4400	Step height,mm	250	Axle load max.C (kg)*	
Front overhang,mm	887	Floor height,mm	780	Tyre size	215/75 R 16
Back overhang,mm	2333	Indoor height,mm	1920	Outer diam.of turning circle,mm	16200
Seat capacity*	22	Standing places*	-		

Length,mm	7300	Front approach(°)	9.0	Gross veh. weight (kg)*	8330
Width,mm	2300	Rear approach(°)	8.0	Axle load max.A (kg)*	3000
Height,mm	2665	Clear height,mm	280	Axle load max.B (kg)*	5330
Wheel base,mm	3385	Step height,mm	320	Axle load max.C (kg)*	
Front overhang,mm	1900	Floor height,mm	465	Tyre size	205/75 R 17.5
Back overhang,mm	2015	Indoor height,mm	2150	Outer diam.of turning circle,mm	14200
Seat capacity*	16 - 28	Standing places*	max. 36		

Length,mm	8000	Front approach(°)	9.0	Gross veh. weight (kg)*	8800
Width,mm	2300	Rear approach(°)	8.0 / 7.0	Axle load max.A (kg)*	9250
Height,mm	2665	Clear height,mm	280	Axle load max.B (kg)*	5550
Wheel base,mm	3565/3825	Step height,mm	320	Axle load max.C (kg)*	
Front overhang,mm	1900	Floor height,mm	465	Tyre size	205/75 R 17.5
Back overhang,mm	2015/2275	Indoor height,mm	2150	Outer diam.of turning circle,mm	14200
Seat capacity*	18 - 32	Standing places*	max. 36		

Length,mm	7828	Front approach(°)	9.0	Gross veh. weight (kg)*	9200
Width,mm	2376	Rear approach(°)	10.0	Axle load max.A (kg)*	3400
Height,mm	3103/2968	Clear height,mm	316	Axle load max.B (kg)*	5800
Wheel base,mm	3650	Step height,mm	340	Axle load max.C (kg)*	
Front overhang,mm	1943	Floor height,mm	961	Tyre size	225/75 R 17.5
Back overhang,mm	2235	Indoor height,mm	1900	Outer diam.of turning circle,mm	16150
Seat capacity*	24 - 28	Luggage comp. (m <sup>3</sup> )	2.5		

Length,mm	7828	Front approach (°)	9.0	Gross veh. weight (kg)*	9200
Width,mm	2376	Rear approach (°)	10.0	Axle load max.A (kg)*	3400
Height,mm	2968	Clear height,mm	300	Axle load max.B (kg)*	5800
Wheel base,mm	3650	Step height,mm	345	Axle load max.C (kg)*	
Front overhang,mm	1943	Floor height,mm	364	Tyre size	215/75 R 17.5
Back overhang,mm	2235	Indoor height,mm	2412	Outer diam.of turning circle,mm	16150
Seat capacity*	18	Standing places*	15		

# IKARUS

# Midi Line

	543	546	405	405 Exp	E-13	E-91
<b>ENGINE</b>						
PERKINS	—	—	●	●	—	—
CUMMINS B	—	—	★	★	○	○
MAN D 08	□	□	★	★	●	●
IVECO 8040	□	□	—	—	—	—
NISSAN	□	□	—	—	—	—
MERCEDES	□	●	★	★	—	—
RENAULT	□	□	—	—	—	—
<b>GEAR BOX</b>						
ZF ECOLITE S5	MANUAL	□	—	—	●	—
VOITH MIDIMAT	AUTOMATIC	□	●	●	—	●
ALLISON AT 545	AUTOMATIC	□	★	★	—	—
ZF S6 36	MANUAL	□	—	—	●	●
<b>FRONT AXLE</b>						
RÁBA	□	□	●	●	●	●
ZF/CSEPEL	□	□	—	—	○	○
<b>DRIVEN AXLE</b>						
RÁBA	□	□	●	●	●	●
ZF	□	□	—	—	—	—
<b>OPTIONS</b>						
Air-conditioning	□	□	—	—	○	—
Heatinsulated side windows "THERMOPAN"	○	○	○	○	○	—
Refrigerator	○	○	—	★	○	—
Audio-system	○	○	○	○	○	○
Seat VOGEL EESO 010	—	—	—	—	○	—
Special paintwork	○	○	○	○	○	○
Different door arrangement	○	○	○	○	—	○
Electronic destination equipment	○	○	○	○	—	○
Seat VOGEL 650	○	○	○	○	—	○

- Serial      ○ Option      ★ Production under preparation  
 — Not possible      □ Depending on chassis type